

Specifications

Cylinders: Inline 8
Piston Displacement: 1462 cu. in. (24 L)
Bore & Stroke: 5.98" x 6.5" (152 x 165 mm)
Compression Ratio: 11:1
Jacket Water System Capacity: 20 gal. (75 L)
Lube Oil Capacity: 56 gal. (212 L)
Low Fuel Pressure Range: 8" WC - 5 psig (According to regulator used: 0.02 - 0.34 bar)
Starting System: 150 psi max. air/gas 24V DC electric
Dry Weight: 7500 lb. (3400 kg)

Cooling Water Flow at	1500 rpm	1800 rpm
Jacket Water gpm (l/m)	103 (390)	130 (492)
Aux. Water gpm (l/m)	25 (95)	35 (133)

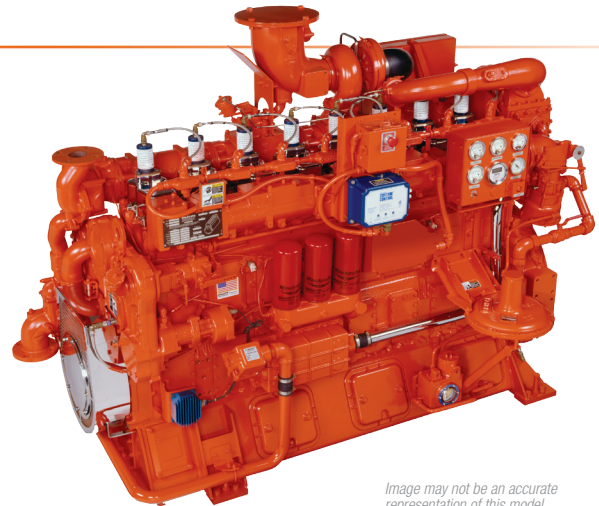


Image may not be an accurate representation of this model

Standard Equipment

AIR CLEANER – Two Stage, dry panel type with rain shield and service indicator. Engine mounted.

BARRING DEVICE – Manual.

BREATHER – Crankcase, closed type (mounted).

CARBURETOR – Single natural gas Impco 600 for low fuel pressure.

CONNECTING RODS – Drop forged alloy steel, angle split, serrated joint, oil jet piston pin lubrication.

COOLING SYSTEM – Jacket water: gear driven jacket water pump, thermostatically controlled, full flow bypass type with nominal 180° F (82° C) outlet temperature. Auxiliary water: gear driven pump supplies water to intercooler and oil cooler circuit.

CRANKCASE – Alloy cast iron, fully ribbed, integral with cylinder frame.

CRANKSHAFT – Drop forged alloy steel, dynamically balanced and fully counterweighted. Viscous vibration dampener.

CYLINDERS – Removable wet type liners of centrifugally cast alloy iron.

CYLINDER HEADS – Eight interchangeable, valve-in-head type, with two hard faced intake and two hard faced exhaust valves per cylinder. Replaceable intake and exhaust valve seats. Mechanical valve lifters with pivoted roller followers.

FLYWHEEL – With 150 tooth ring gear (for Delco electric and air/gas starters). Flywheel machined to accept SAE 620D, 18" (457 mm) diameter clutch.

FLYWHEEL HOUSING – SAE #0, nodular iron housing. Provision for two magnetic pickups and vertical mounting pads.

EXHAUST SYSTEM – Water cooled exhaust manifold, Outlet flange for ANSI 8" 125# flange.

GOVERNOR – Woodward SG hydraulic with manual speed control.

IGNITION – Waukesha Custom Engine Control electronic ignition system with coils, cables and spark plugs. Non-shielded. 24V DC power required. Includes emergency stop/service engine protection switch for local override of remote controls.

INTERCOOLER – Air-to-water.

LIFTING EYES – For engine only.

LUBRICATION SYSTEM – Gear type pump, full flow spin-on filters and industrial base type oil pan, 56 gallon (212 litres) capacity, including filters. Engine mounted plate type oil cooler.

MOUNTING – Base type oil pan.

PAINT – Oilfield orange.

PISTONS – Aluminum alloy, three ring, with patented high turbulence combustion bowl. Oil jet cooled with full floating piston pin. 11:1 compression ratio.

TURBOCHARGER – Exhaust driven, dry type with wastegate. For 1400 – 1800 rpm applications.

POWER RATINGS: H24GLD VGF Series Gas Engines

Model	I.C. Water Inlet Temp.	C.R.	Bore & Stroke in. (mm)	Displ. cu. in. (litres)	Brake Horsepower (kWb)									
					1800 RPM		1600 RPM		1500 RPM		1400 RPM ¹		1200 RPM ¹	
					C	I	C	I	C	I	C	I	C	I
H24GLD	130° (54°)	11:1	5.98 x 6.5 (152 x 165)	1462 (24)	530 (400)	585 (440)	475 (355)	520 (390)	445 (330)	490 (365)	415 (310)	455 (340)	355 (265)	395 (290)
H24GLD*	130° (54°)	11:1	5.98 x 6.5 (152 x 165)	1462 (24)	585 (440)	—	520 (390)	—	490 (365)	—	455 (340)	—	—	—

		1800 rpm		1500 rpm	
		C	I	C	I
	Power bhp (kWb)	530 (395)	585 (440)	445 (330)	490 (365)
	BSFC (LHV) Btu/bhp-hr (kJ/kWh)	6996 (9907)	6894 (9671)	6782 (9655)	6698 (9488)
	Fuel Consumption Btu/hr x 1000 (kW)	3708 (1087)	4033 (1182)	3018 (885)	3282 (962)
Emissions	NOx g/bhp-hr (mg/nm ³ @ 5% O ₂)	2.00 (810)	2.00 (810)	2.4 (981)	2.50 (1011)
	CO g/bhp-hr (mg/nm ³ @ 5% O ₂)	1.30 (535)	1.30 (542)	1.4 (564)	1.30 (517)
	THC g/bhp-hr (mg/nm ³ @ 5% O ₂)	1.7 (683)	1.60 (652)	2.2 (836)	2.00 (806)
	NMHC g/bhp-hr (mg/nm ³ @ 5% O ₂)	0.27 (108)	0.26 (105)	0.31 (125)	0.30 (121)
Heat Balance	Heat to Jacket Water Btu/hr x 1000 (kW)	980 (287)	1043 (306)	833 (244)	886 (260)
	Heat to Lube Oil Btu/hr x 1000 (kW)	126 (37)	129 (38)	91 (27)	93 (27)
	Heat to Intercooler Btu/hr x 1000 (kW)	226 (66)	256 (75)	153 (45)	174 (51)
	Heat to Radiation Btu/hr x 1000 (kW)	89 (26)	89 (26)	83 (24)	83 (24)
	Total Exhaust Heat Btu/hr x 1000 (kW)	1077 (316)	1177 (345)	839 (246)	921 (270)
Intake/Exhaust System	Induction Air Flow scfm (Nm ³ /hr)	1139 (1749)	1238 (1903)	927 (1425)	1008 (1549)
	Exhaust Flow lb/hr (kg/hr)	4964 (2251)	5398 (2449)	4041 (1834)	4393 (1992)
	Exhaust Temperature °F (°C)	838 (448)	842 (450)	804 (429)	808 (431)

¹Low speed turbocharger required for operation at 1200-1400 rpm.

*These power ratings require Price Code 1100 and are available continuously when applied per WKI@Power and Timing Curves. It is permissible to operate up to 5% overload for two hours in each 24 hour period.

Typical heat data is shown, however no guarantee is expressed or implied. Consult your Dresser Waukesha Application Engineering Department for system application assistance.

All natural gas engine ratings are based on a fuel of 900 Btu/ft³ (35.3 MJ/nm³) SLHV, with a 91 WKI®. For conditions or fuels other than standard, consult the Dresser Waukesha Application Engineering Department.

Data based on standard conditions of 77°F (25°C) ambient temperature, 29.53 inches Hg (100kPa) barometric pressure, 30% relative humidity (0.3 inches HG / 1 kPa water vapor pressure).

Fuel consumption based on ISO3046/1-1995 with a tolerance of +5% for commercial quality natural gas having a 900 BTU/ft³ (35.3 MJ/nm³) SLHV.

Heat data based on fuel consumption +2%.


Heat rejection based on cooling exhaust temperature to 77°F (25°C).

Rating Standard: All models - Ratings are based on ISO 3046/1-1986 with mechanical efficiency of 90% and Tcra (clause 10.1) as specified above limited to ± 10° F (5° C). Ratings are also valid for SAE J1349, BS5514, DIN6271 and AP17B-11C standard atmospheric conditions.

C = ISO Standard Power/Continuous Power Rating: The highest load and speed which can be applied 24 hours per day, seven days per week, 365 days per year except for normal maintenance. It is permissible to operate the engine at up to 10% overload, or a maximum load indicated by the intermittent rating, whichever is lower, for two hours in every 24 hour period.

I = Intermittent Service Rating: The highest load and speed that can be applied in variable speed mechanical system application only. Operation at this rating is limited to a maximum of 3500 hours per year.

Consult your local Waukesha representative for system application assistance. The manufacturer reserves the right to change or modify without notice, the design or equipment specifications as herein set forth without incurring any obligation either with respect to equipment previously sold or in the process of construction except where otherwise specifically guaranteed by the manufacturer.

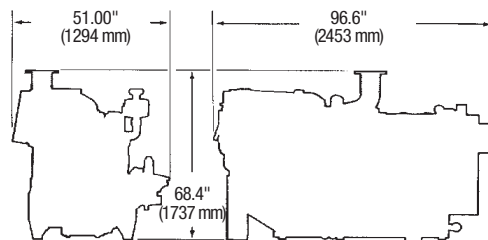

Dresser, Inc.
Dresser Waukesha
 1101 West St. Paul Avenue
 Waukesha, WI 53188-4999
 T. 262 547 3311
 F. 262 549 2795



Bulletin 9101 0710

© 2010 Dresser, Inc. All rights reserved. Waukesha, VGF, WKI, and Enginator are trademarks/registered trademarks of Dresser, Inc., Dresser Waukesha

www.dresser.com/waukesha